


Automatic sliding fire door **FEUCORD T30/R30 record 16**



record sliding fire doors
Functional, dependable and safe!



record

your global partner for entrance solutions



Automatic sliding fire door **FEUCORD** T30/R30 record 16, approved for escape and rescue routes.

FEUCORD has been developed as an integrated system and undergone EMPA fire testing to demonstrate its fire-proof capabilities. In compliance with new regulations, the **FEUCORD** system was tested inside and outside to withstand fire, heat and smoke for at least 30 minutes.

FEUCORD easily passed the test and has been awarded VKF/AEAI ** quality norms and is registered as fire protection.

FEUCORD is officially recognized as part of any fire protection system.

**Swiss quality certificate for fire protection No. 9518 und No. 9519




Expert advice

Dependable construction

Professional maintenance

... throughout Switzerland

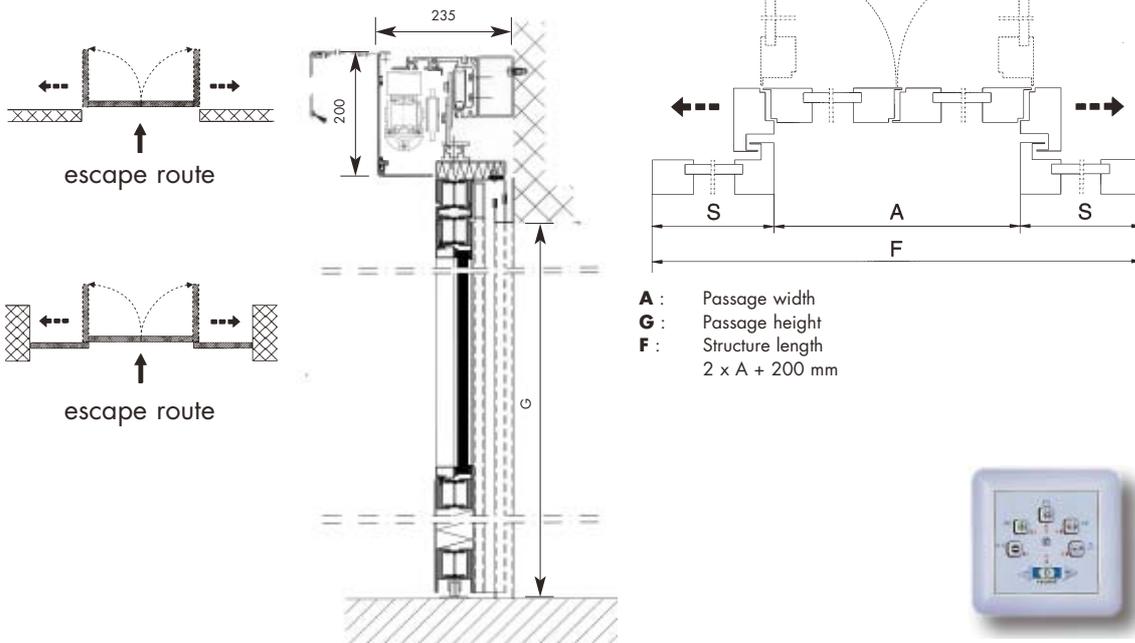

**FEUCORD –
fire and smoke-proof door**

The T30 and R30 single or double automatic sliding doors are available either in hardened steel to prevent buckling caused by heat build-up, and feature Palusol seals and Pyrobel fire-proof glazing, or are double-sided with sheet steel insulation. The R30 is fire and smoke-proof for 30 minutes, and the T30 fully resists smoke, flames and heat for 30 minutes. In case of fire or power failure, emergency closing is ensured by a back-up system with electronic control. Both fixed and moving parts have been thoroughly tested.

**FEUCORD –
with or without escape route function**

Doors installed in escape or rescue routes are additionally equipped with manual opening; they swing open to permit escape at any time. Doors close automatically after evacuation thanks to electronic monitoring and control.

**FEUCORD –
uses dependable door operators with a proven track record**

To optimize reliability, the **FEUCORD** utilizes the same system 16 drive unit as used in thousands of standard automatic sliding doors. Both T30 and R30 models, with or without escape and rescue route function, use the same dependable and flexible drive unit.

**FEUCORD –
robust and good-looking**

With a maximum opening width of 1760mm, the **FEUCORD** is a spacious entrance. Its elegant handles and hidden electronic and optical components give the door uncluttered and pleasing aesthetics, lending elegance to entrances where fire safety and security is a priority.



zertifiziertes Qualitätssystem
ISO 9002 / EN 29002
Reg. Nr. 11769-01



Security with FEUCORD!

**Tested as a system
Swiss quality certificate for fire protection AEA1
No. 9518 and No. 9519**

Technical data

Passage width A

Double sliding doors 1000 - 1760 mm (1)
1 Other dimensions and single (1 leaf) sliding doors on request

Passage height G

Maximal height recommended 2400 mm

Leafs maximal weight

Double sliding doors 2 x 200 kg
Single sliding doors 1 x 250 kg

Mechanism dimensions including casing

Height 200 mm
Depth 235 mm

Opening speed (programmable)

Double sliding doors max. 0.7 m per 1.0 s
Single sliding doors max. 0.7 m per 1.5 s

Wiring data

Supply voltage 230V, 50/60 Hz
Rated current 0,6 A
Power input 100 W
Power input out of operation (door closed) 14 W
Fuses min. 2.5 A inert.



your global partner for entrance solutions

record 16 FEUCORD T30/R30

Automation you've never experienced before!



- Switzerland**
 record Türautomation AG
 Allmendstrasse 24
 CH-8320 Fehraltorf
Tel. +41 1 954 91 91
Fax +41 1 954 92 00
email gch@record.ch
- CH West**
 record automatisé de portes SA
 Route de Denges 28G
 CH-1027 Lonay
Tel. +41 21 803 79 87
Fax +41 21 803 79 90
- Tessin**
 Galvalux SA
 Zona Sirecce
 CH-6934 Bioggio TI
Tel. +41 91 604 53 35
Fax +41 91 604 68 86
- Registered office**
 agta record ag
 Allmendstrasse 24
 CH-8320 Fehraltorf
Tel. +41 1 954 91 91
Fax +41 1 954 92 00
email info@agta-record.com
Internet www.agta-record.com



Headquarters in Fehraltorf, Switzerland



www.record.ch



record

your global partner for entrance solutions