


Specific automatic door

record

record Feucord

The reliable and robust automatic fire protection sliding door, developped as a system, resistant against fire and smoke - also with escape route door



Standard Equipment consists of:

- Complete record door system 20 with all-purpose-door leaf guides, basic accessories, control unit BDE-D with display, self-calibrating

Technical Data		
Clear opening width (A) E-STA D-STA		at application max. 1000 – 1760 mm
Weight of door leaves max. D-STA E-STA DUO		2 x 100 kg 1 x 150 kg 2 x 200 kg or 1 x 250 kg
Operating speed	D-TSA E-TSA	0,7 m/s 0,7 m/s
Clear height of passage (G)		up to 2400 mm
Casing dimension (Height/depth) (support length (F) = 2A + 100)		200 / 235 mm
Electrical connections		230 V /50/60 Hz
Profiles (in mm)		Profile steel tube with Palusol seal and pyrobel-fire protection-glazing
Montage variants		
→ Lintel installation, self supporting or ceiling		

Optional accessories

- Standard locking device VRR
- Manual unlocking device (HEI inside, HEA outside)
- Mechanical control unit BDE-M
- Key operated contact SSK
- Module for extended functionality FEM
- Alarm control VRR and door position

- fond rail
- BAT 16 battery-pack for emergency service by power failure
- LON 16 communication-module for integration with building services control
- Emergency cut-off function

Basic functions

(customised program)

- Automatic operation with total or reduced opening width
- One way traffic
- Continuously open
- Manual control
- Locked
- Operated lock
- bell control
- Automatic reversal

Optional features

- emergency cut-off function
- Door leave surveillance
- locking device surveillance
- interlock control
- night control
- remote control and control

llco

Special conceive for instructions in public buildings, as fire resistant-sections door, with or without escape route door, such as

- -- Hospitals, clinics, nursing homes
- -- Banks, administrative buildings
- -- Markets, shops and shopping centres
- -- Industry buildings and business buildings
- -- Restaurants and Hotels etc.

Your benefit

automatic door with integrated security

record

reasonably priced, reliable, durable

Expandable to ...

- DUO and fire resistant door with escape door system



Specific automatic door



record Feucord


The reliable and robust automatic fire protection sliding door, developped as a system, resistant against fire and smoke - also with escape route door


Technical data


Vertical section


Example with:

- Profile system Janisol 2 Casing H 200 mm

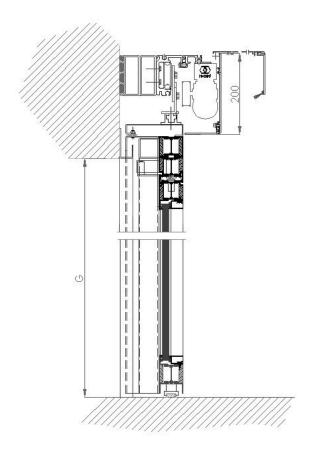







A: passage width G: passage height F: medium length